4077 e-dispenser 50



Adapter:

1:1	4042-11MP
1:2	4042-21MP
1:4	4042-41MP
1:10	4042-101MP





4480 Controller



2400 Stand, small



4472 Foot switch

Description

Dosing out of 50 ml DUO cartridges.

Drive via servo motor with recirculating ball screw. Parallel piston movement.
Mixing ratio results from cartridge geometry.
A retraction mechanism relaxes the dosing material in the cartridge and thus prevents dripping.

Adjustable parameters (dosing quantity, dosing speed, etc.) via controller.


axiss dispensing systems

axiss Achsen-und Dosiersysteme GmbH
Felix-Wankel-Str. 3
75210 Keltern-Dietlingen

Telefon +49 (0)7236 981401
Fax +49 (0)7236 981402
www.axiss.de - info@axiss.de

4077 *e*-dispenser 50

Dimensional drawing (Dimensions in mm)

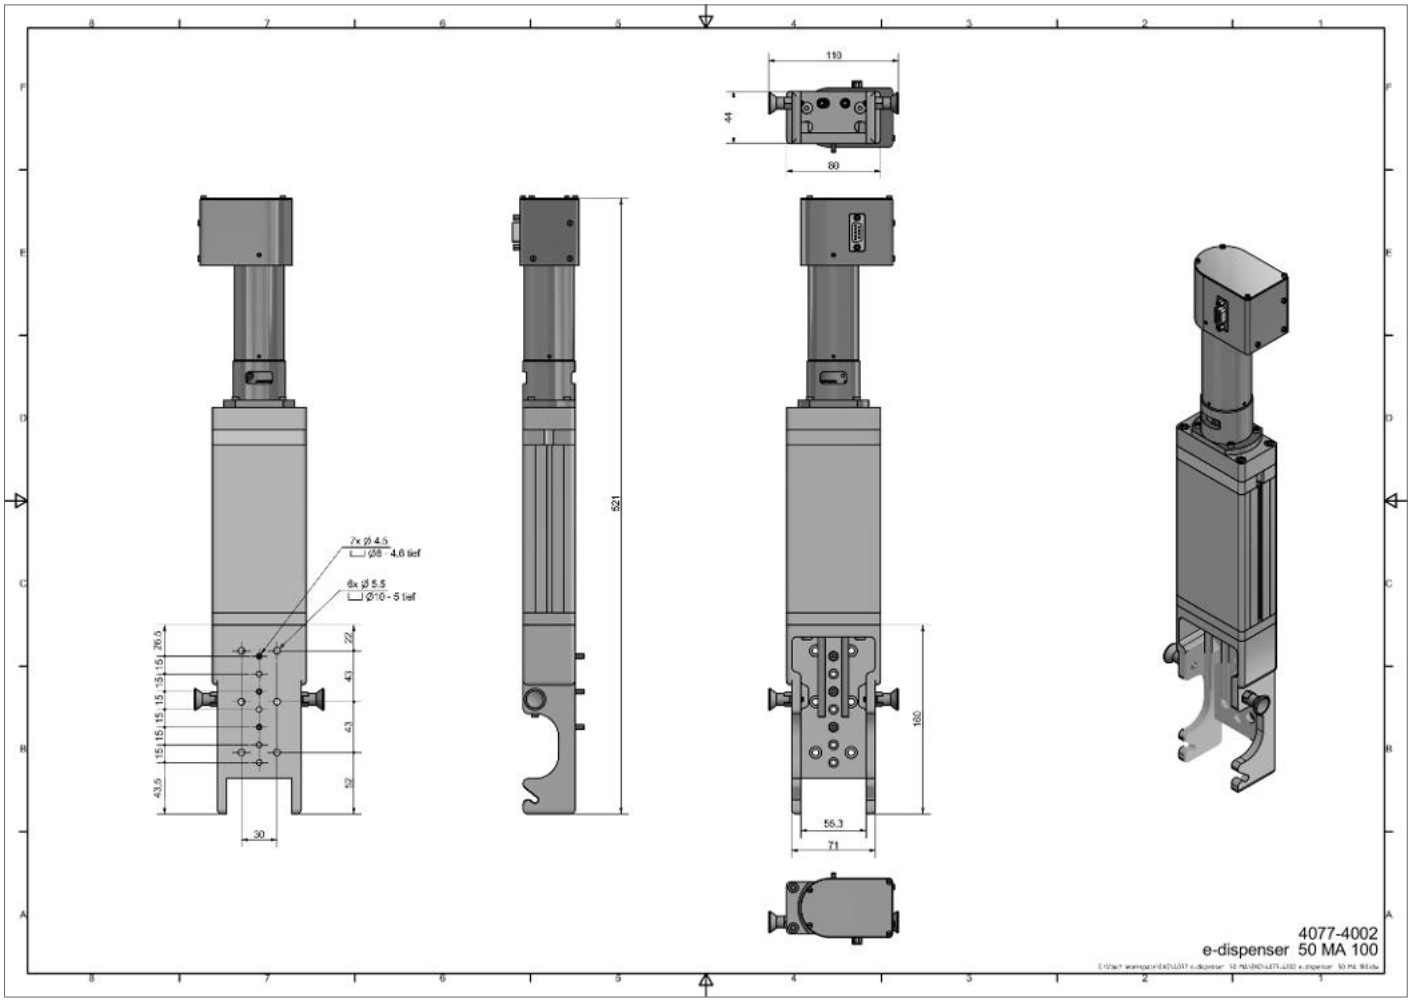

Cartridge size (DUO)	50 ml
Dosing accuracy	+/- 0,2 ml (material despending)
Dosing speed	0,01 – 0,5 ml/s
Dosing volume min.	0,1 ml
Possible mixing ratios	1:1 / 1:2 / 1:4 / 1:10
Viscosity	Low to high viscous dosing media
Dimensions	527 x 110 x 44 mm
Weight	2,6 kg

axiss dispensing systems

axiss Achsen-und Dosiersysteme GmbH
Felix-Wankel-Str. 3
75210 Keltern-Dietlingen

Telefon +49 (0)7236 981401
Fax +49 (0)7236 981402
www.axiss.de - info@axiss.de