

4011 Gear pump 0,6 ml



4480 Controller



9011 Container, pneumatical



9012 / 9050 Container (Tube 600 ml)



9020-9999 Magnetic-Sensor /
7002-0004 Limit-Sensor

Description


Electrical volume dosing. The flow rate can be set firmly.

Flexible quantity setting. The dosage takes place evenly and independently of the filling quantity.

The volume-related dosage achieves high process reliability.

4011 Gear pump 0,6 ml

Dimensional drawing (Dimensions in mm)

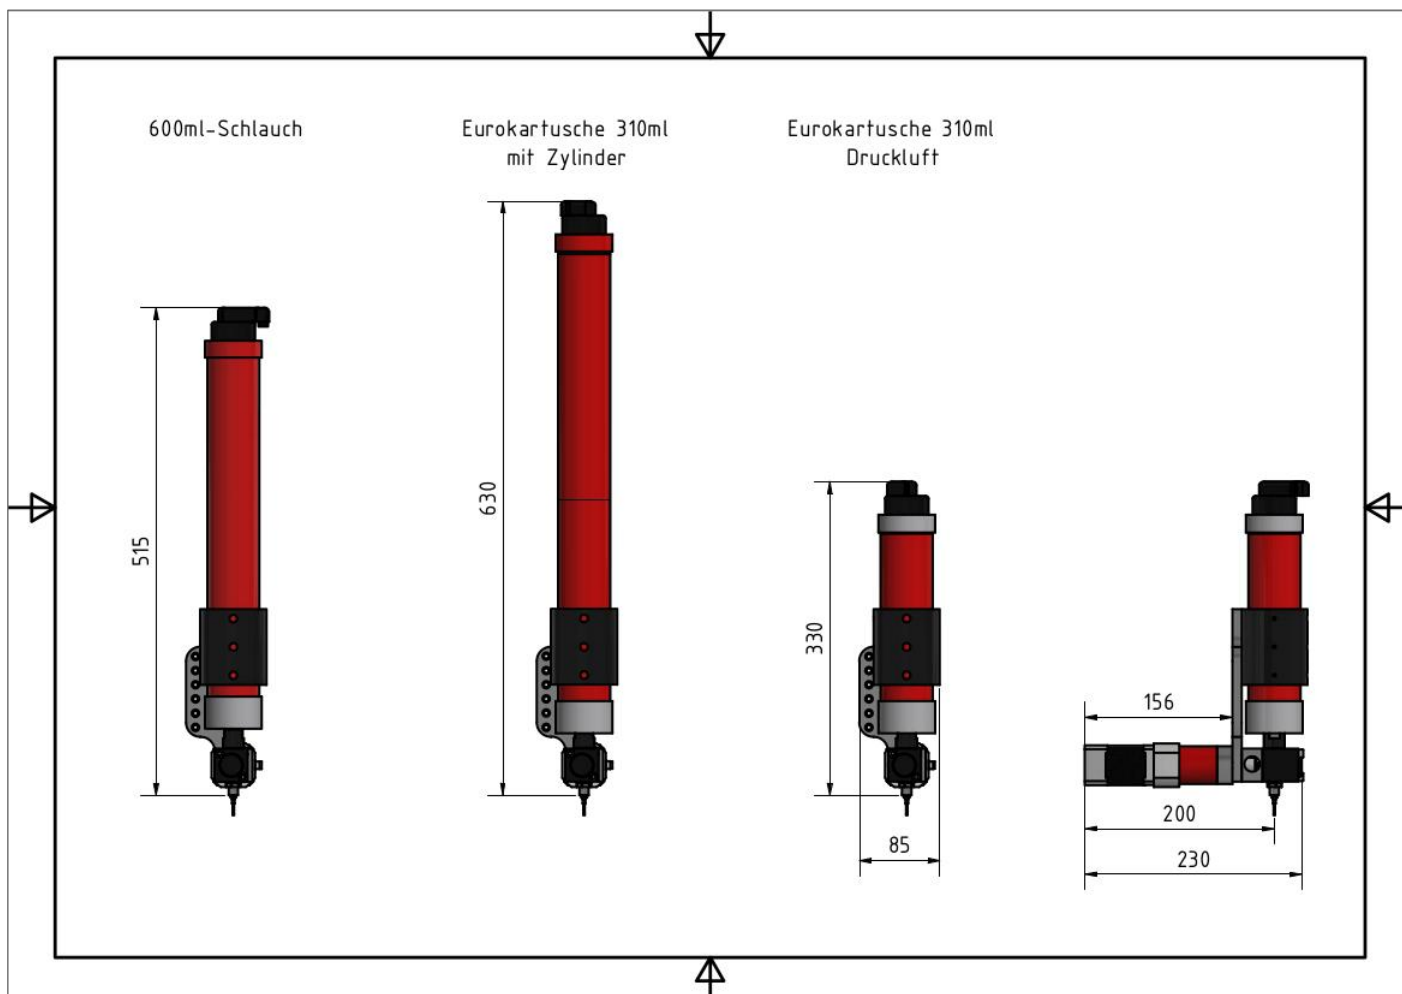

Dosing volume	0,6 cm ³ / Rotation
Dosing accuracy	+/- 0,02 ml (material depending)
Viscosity	Middle to high viscous dosing media
Max. permitted airpressure in container	6 bar
Parameter-Programming	Machine-Software or controller
External start	Via potential-free closer
Output	Volume display and signal cartridge empty
Process security	Dosage takes place evenly and independent of the filling quantity / Steady material flow