

1302 Double-Rotation axis



Description


Circular or dot-like application of adhesive and sealing media.

Controlled by Dispensmove Software DiSoft or with external controller.

Circular dosing in an angle up to 340°.

1302 Double-Rotation axis

Dimensional drawing (Dimensions in mm)

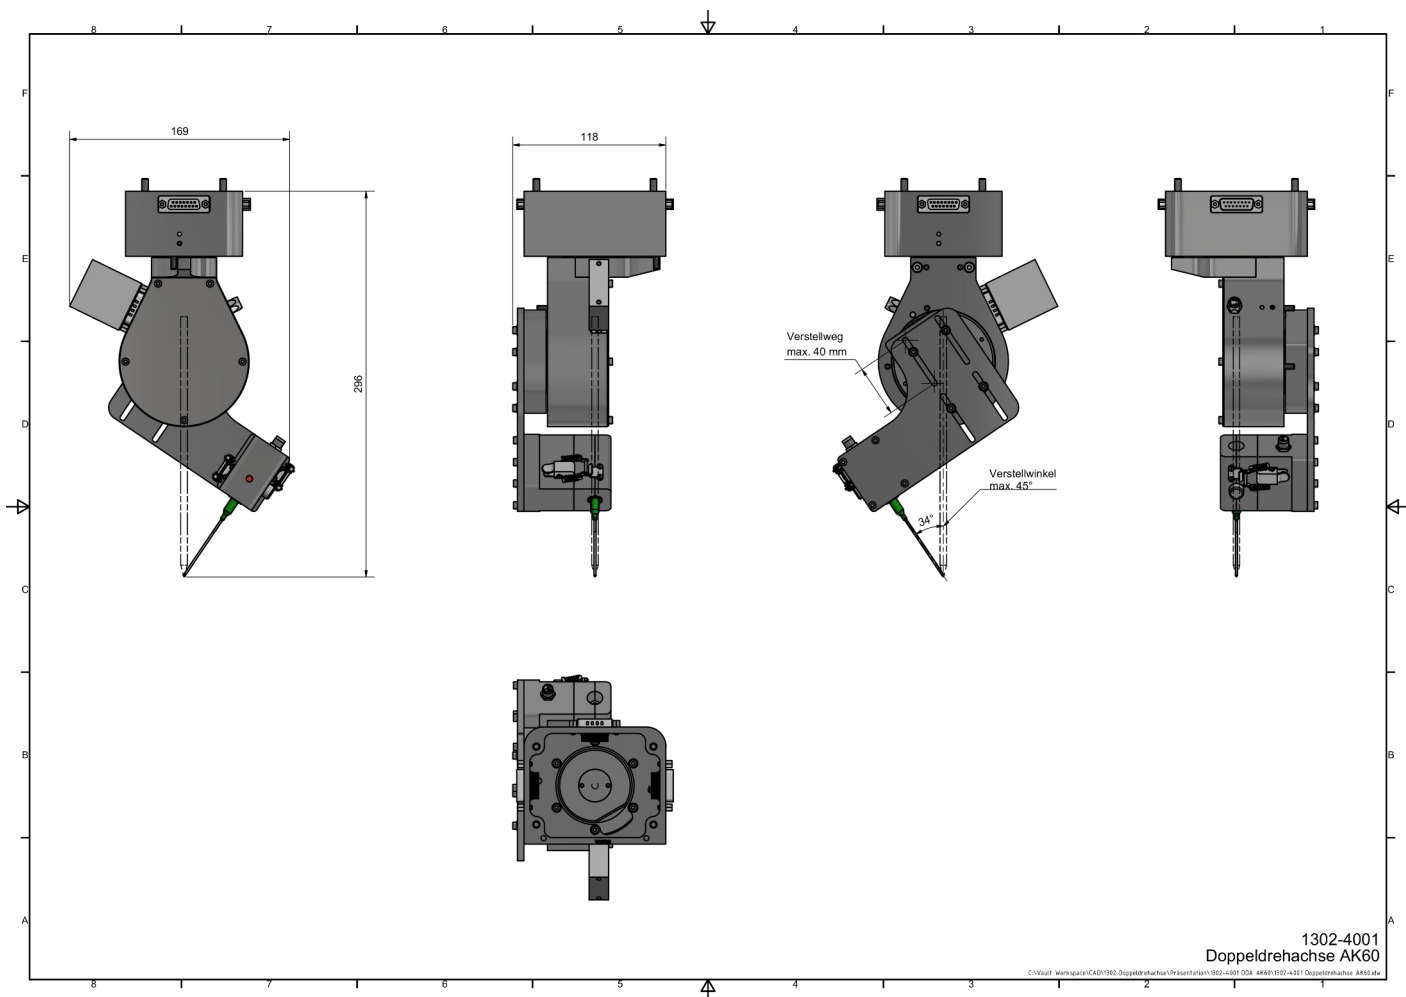

Positioning accuracy	0,18°
Movement speed	1/2 Rotation/second
Swivel Setting Dosing needle	Max. 45°
Range setting Dosing needle	Max. 40 mm
Rotation range	0° to 340°
Workload	1 kg
Controller	Via DiSoft as 4th. axis / with external controller
Dimensions	296 x 118 mm x 169 mm