


0400 Dispensmove 400



0002 DiSoft



1701 Interface-Card



1523 Needle sensor



2510 Purging unit

Description


Automatic application of adhesives and sealants. Freely programmable for the dosage of dots, lines, arcs and combinations via PC.

Installation of different safety devices is also possible as the integration into an external controller.

An interface card switches various machine components via 12 inputs and outputs.

0400 Dispensmove 400

Dimensional drawing (Dimensions in mm)

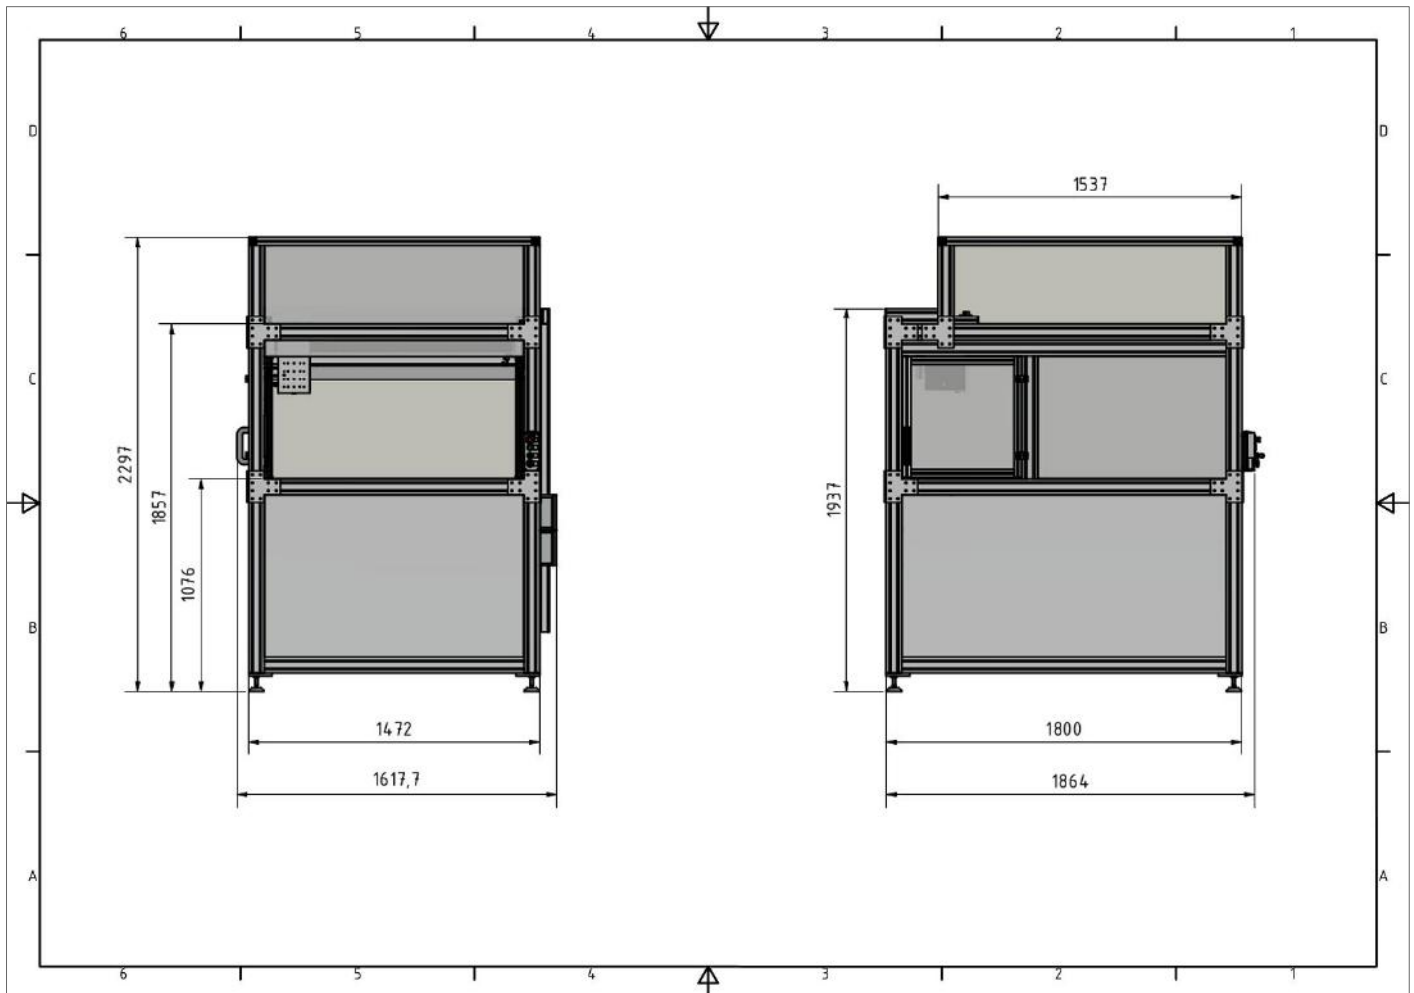

| | |
|--------------------------|--|
| Interpolation | 3D Interpolation of axes / Triggering of dosing valve via 4th. axis. |
| Positioning accuracy | X und Y = 0,1 mm / Z = 0,05 mm |
| Movement speed | Up to 400 mm/s |
| Possible axis workload | Up to 3 kg, optional to 7 kg |
| Programming | Software „DiSoft“ / Import of CAD data (hpgl.files) |
| Interface Input / Output | 12 Inputs, 12 Outputs |
| Working area | (x)1000 (y)1000 (z)200 mm |
| Dimensions | (W)1617 (D)1864 (H)2297 mm |
| Weight | Depending on equipment |