


0307 Dispensmove 300 Rotary Table



1528 Height sensor /
Distance
measurement



0002 DiSoft



Barcode-Scanner



Control element
electrical substructure /
Lifting table

Equipment example. Further machine sizes and options on request.

Description

Automatic application of adhesives and sealants with 180° rotation table. Freely programmable for the dosage of dots, lines, arcs and combinations via PC, Software DiSoft.


Automatic recognition of parts numbers and loading of respective dosing program. Two-hand triggering of the dosage. Simultaneous placement and dosage of parts.

Ergonomic work through height -adjustable substructure / Lifting table.

An interface card switches various machine components via 12 inputs and outputs

0307 Dispensmove 300 Rotary Table

Dimensional drawing (Dimensions in mm)

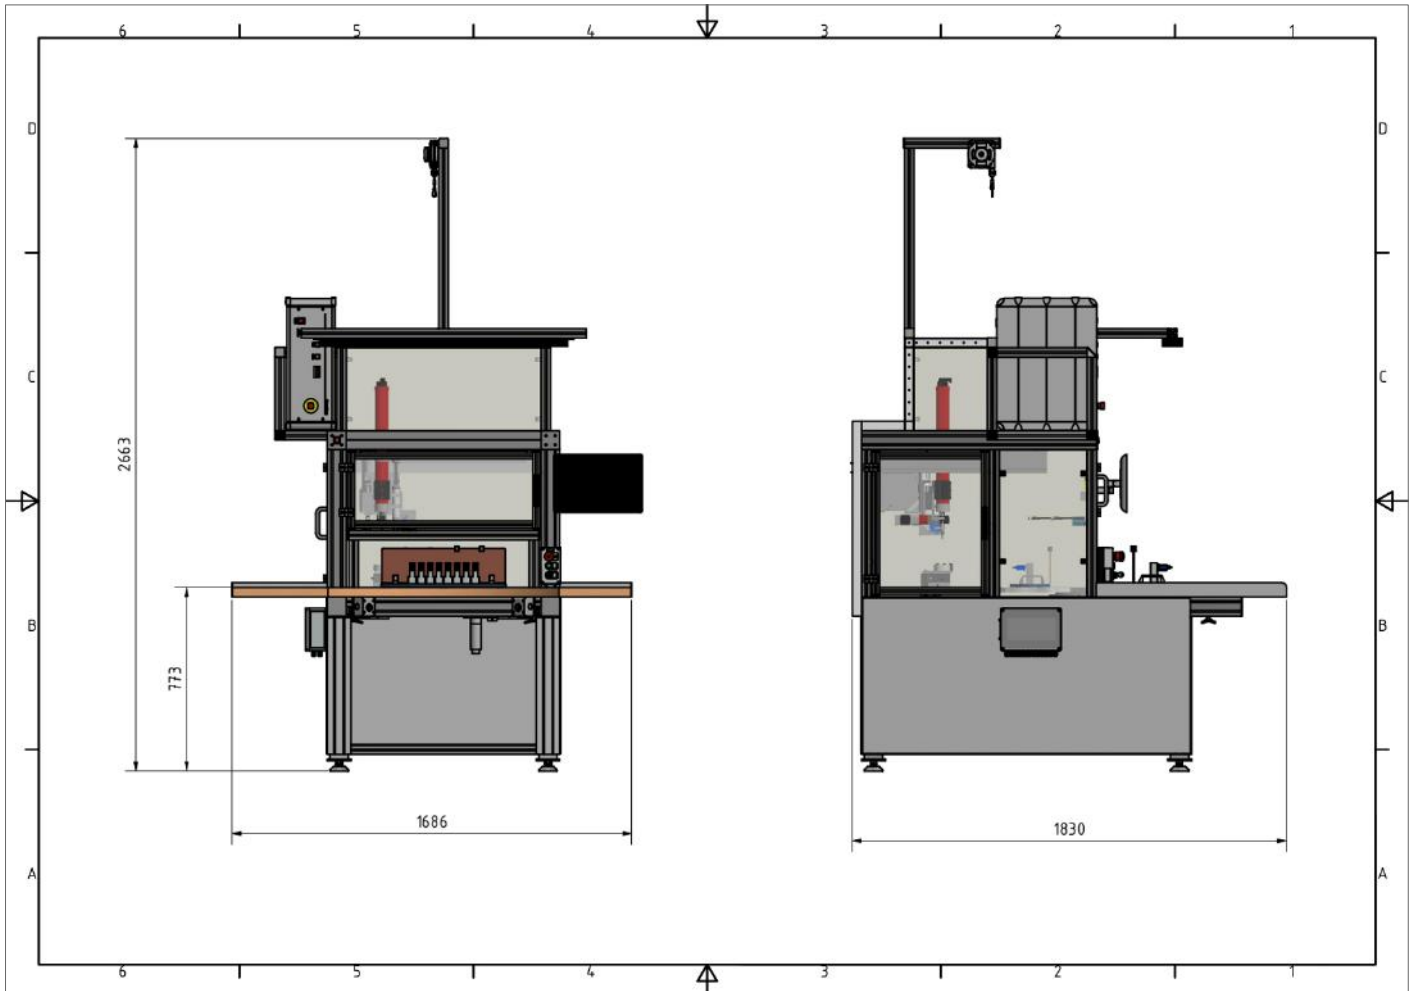

Interpolation	3D Interpolation of axes / Triggering of dosing valve via 4th. Axis.
Positioning accuracy	X and Y = 0,1 mm / Z = 0,05 mm
Movement speed	Up to 400 mm/s
Possible axis workload	Up to 3 kg, optional to 7 kg
Rotary table	180° rotation
Programming	Software „DiSoft“ / Import of CAD data (hppl.files)
Input / Output	12 Inputs, 12 Outputs
Working range	(x)600 (y)480 (z)100 mm
Dimensions	(W)1686 (D)1830 (H)2663 mm
Weight	Depending on equipment