

4026 1k Pen 3-5-10-30 ml



(Exemplary Image)



4480 Controller



2400 Stand, small



4472 Foot switch

Description


Mountable, electrically operated 1k dosing valve. The dosing material is dispensed directly from a material cartridge via a spindle and a stepper motor. Cartridge replacement via screw cap.

Homogeneous delivery of the dosing quantity over the entire length of the cartridge.

The control system can be used to enter the dosing quantity, speed, and other parameters.

4026 1k Pen 3-5-10-30 ml

Dimensional drawing (Dimensions in mm)

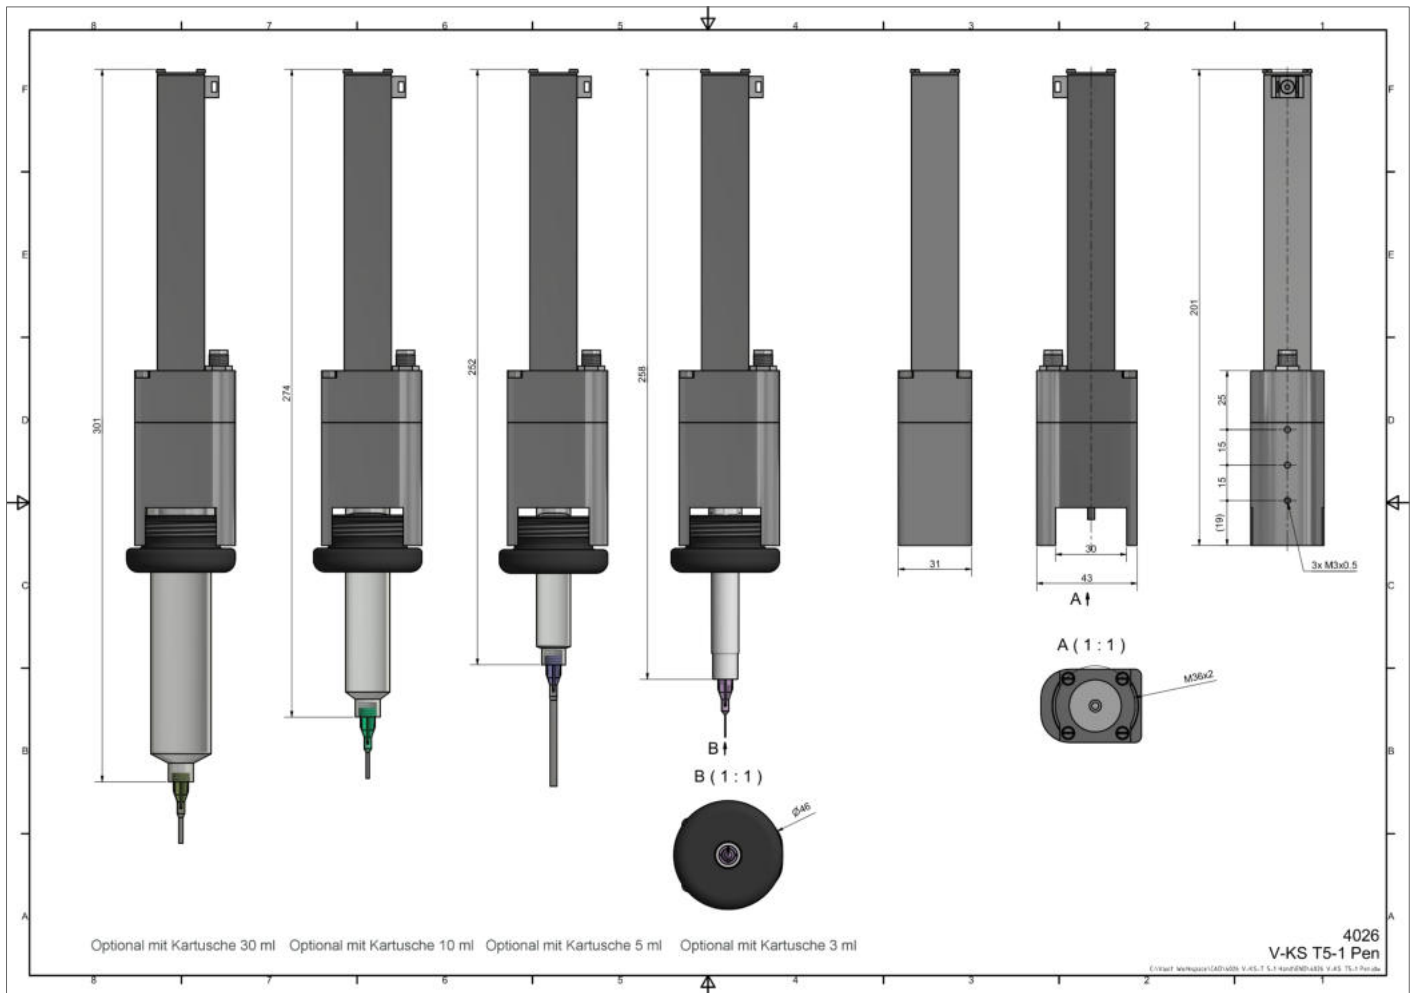

Cartridge size	3 / 5 / 10 / 30 ml
Spindle motor pitch	5 x 1 mm
Dosing accuracy	+/- 0,05 ml (material depending)
Dosing volume min.	0,1 ml
Viscosity	Low viscous dosing media
Dimensions	See dimensioning sheet above
Weight	ca. 400 g