4076 *e*-dispenser 50 HP





Adapter:

1:1	4076-11MP
1:2	4076-21MP
1:4	4076-41MP
1:10	4076-101MP



5056-1 Transport case
(Illustration similar)



5055-1 Accu-Set with
charger 5,0 Ah, 18V

Description

Electric dosing gun for dispensing from 2k-DUO cartridges. Drive via servo motor with recirculating ball screw.
The pistons move parallelly to each other.
The mixing ratio results from the cartridge geometry.

The gun doses in volume dosing mode and continuous dosing. By retract, the material within the cartridge is eased and therefor prevents a dripping.

With rotary poti and pressure switch, parameters such as dosing quantity, metering speed, etc. can be set.


axiss dispensing systems

axiss Achsen-und Dosiersysteme GmbH
Felix-Wankel-Str. 3
75210 Keltern-Dietlingen

Telefon +49 (0)7236 981401
Fax +49 (0)7236 981402
www.axiss.de - info@axiss.de

4076 *e*-dispenser 50 HP

Dimensional drawing (Dimensions in mm)

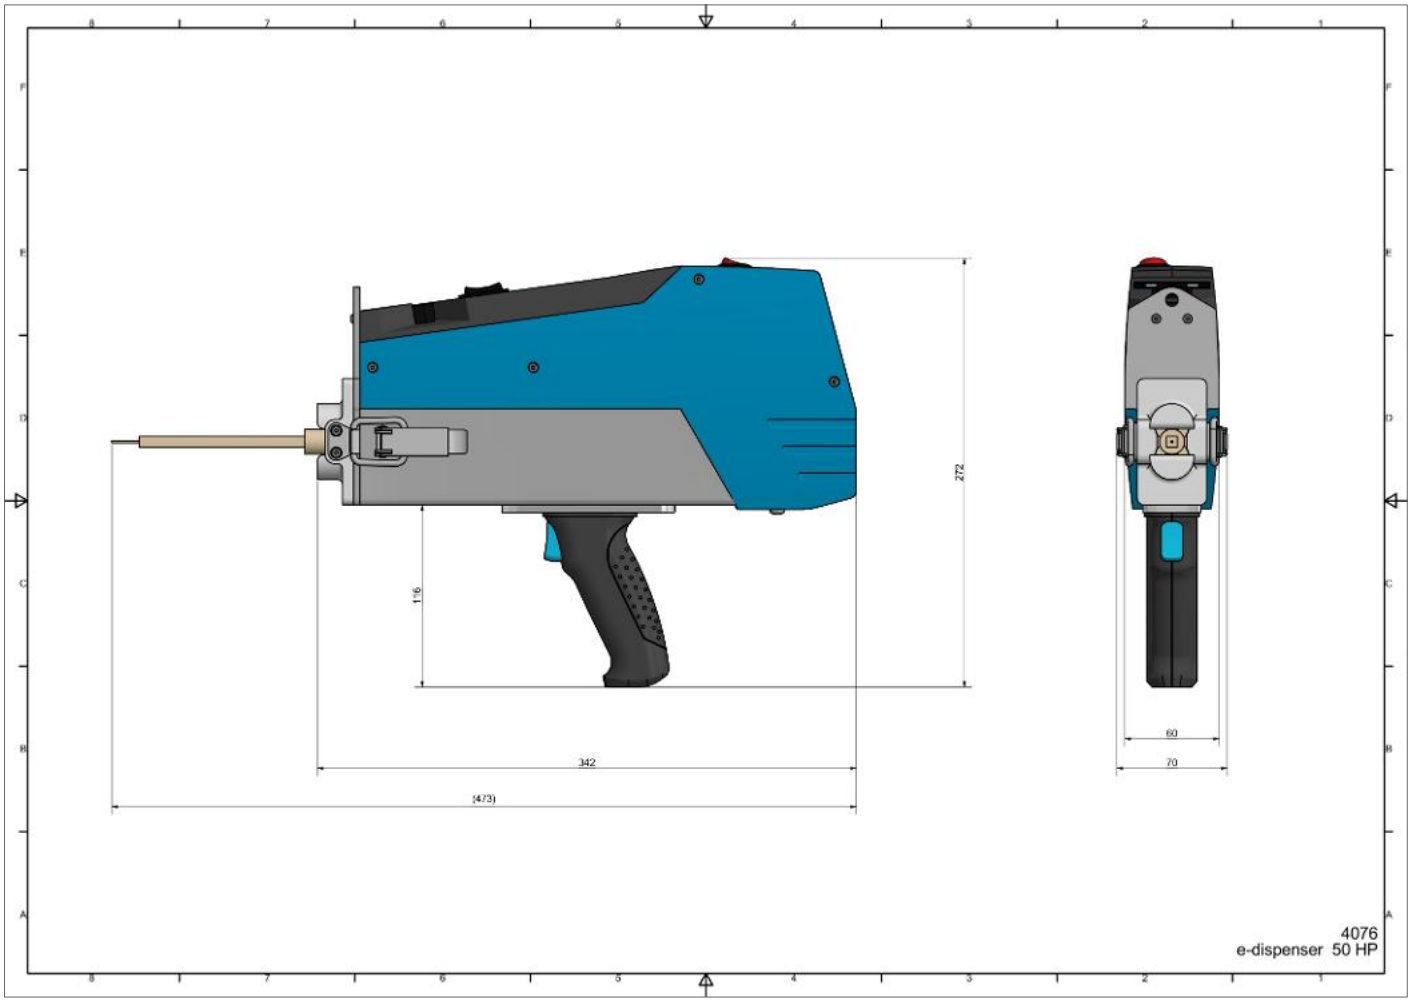

Cartridge size (DUO)	50 ml
Dosing accuracy	+/- 0,02 ml (material depending)
Dosing speed	0,01 – 0,5 ml/s
Dosing volume min.	0,1 ml
Possible mixing ratios	1:1 / 1:2 / 1:4 / 1:10
Viscosity	Low- to high viscous dosing media
5055-1 Accu-Set	5055-11 Accu carrier with beltclip 5055-12 Accu 5,0Ah, 18V 5055-13 Accu-Charger
Dimensions	554 x 277 x 72 mm
Weight	3,7 kg

axiss dispensing systems

axiss Achsen-und Dosiersysteme GmbH
Felix-Wankel-Str. 3
75210 Keltern-Dietlingen

Telefon +49 (0)7236 981401
Fax +49 (0)7236 981402
www.axiss.de - info@axiss.de